

型号表示方法



C	① 类型 M	② 规格 25	-	③ 连接口 B	-	④ 密封件材质 无	⑤ 止回阀 无
----------	-------------------------	--------------------------	---	--------------------------	---	----------------------------	--------------------------

① 类型			② 容量等同真空泵规格		④ 密封件材质		⑤ 止回阀
标记	进气压力(MPa)	最大真空度(kPa)	25	0.25 KW	无	丁腈橡胶	无 不带止回阀
L	0.6	-80	50	0.50 KW	V	氟橡胶	A 带止回阀
M	0.4~0.6	-92	75	0.75 KW	E	三元乙丙	
H*	0.4~0.6	-98.6	100	1.00 KW			
			125	1.25 KW			
			150	1.50 KW			
			175	1.75 KW			
			200	2.00 KW			

*仅有CH (50)
75

③ 连接口			
标记	供气口	真空口	排气口
B	G1/8"	G3/4"	外置消声器
C	G1/4"	G3/4"	外置消声器
D	G1/4"	G1"	外置消声器

规格

型号	最大吸入流量 (l/min)	空气消耗量 (l/min)	最大真空度 (kPa)	噪音 (dBA)	>最小软管内径 ϕ mm(管长 \leq 2m)				
					供气	真空	排气		
CL25	360	105	-80	65	4	12	12		
CL50	650	210			6	15	15		
CL75	820	315			8	19	22		
CL100	990	420			8	19	22		
CL125	1100	525			10	25	32		
CL150	1300	630			10	25	32		
CL175	1680	735			10	32	40		
CL200	2060	840			10	32	40		
CM25	354	105			-92	65	4	12	12
CM50	647	210					6	15	15
CM75	890	315	8	19			22		
CM100	1100	420	8	19			22		
CM125	1200	525	10	25			32		
CM150	1380	630	10	25			32		
CM175	1490	735	10	32			40		
CM200	1580	840	10	32			40		
CH25	168	156	-98.6	65			4	12	12
CH50	365	318					6	15	15
CH75	504	456			8	19	22		



不同真空度(-kPa)的吸入流量(l/min)和抽气时间(s)

型号	真空吸入流量(l/min)[抽气时间(s)]										
	0	10	20	30	40	50	60	70	80	90	98
CL25	360	210[0.02]	156[0.05]	102[0.1]	54[0.18]	36[0.33]	30[0.33]	21[0.8]	-	-	-
CL50	650	420[0.01]	265[0.025]	176[0.05]	108[0.09]	72[0.17]	60[0.27]	36[0.4]	-	-	-
CL75	820	630[0.008]	370[0.017]	245[0.033]	162[0.06]	108[0.11]	90[0.18]	50[0.27]	-	-	-
CL100	990	740[0.007]	480[0.015]	323[0.029]	206[0.05]	144[0.083]	120[0.13]	70[0.2]	-	-	-
CL125	1100	848[0.006]	550[0.014]	390[0.026]	240[0.045]	180[0.076]	150[0.11]	87[0.19]	-	-	-
CL150	1300	910[0.005]	618[0.013]	456[0.022]	280[0.037]	216[0.062]	170[0.095]	102[0.15]	-	-	-
CL175	1680	1060[0.005]	680[0.012]	510[0.021]	314[0.035]	267[0.06]	190[0.087]	120[0.14]	-	-	-
CL200	2060	1210[0.004]	740[0.01]	575[0.018]	365[0.03]	294[0.051]	220[0.078]	134[0.12]	-	-	-
CM25	354	220[0.022]	120[0.062]	78[0.12]	43[0.22]	34[0.37]	25[0.57]	10[1.2]	5[1.9]	0.8[4.2]	-
CM50	647	400[0.011]	240[0.031]	156[0.06]	87[0.11]	69[0.19]	52[0.29]	20[0.6]	10[1.16]	1.6[2.2]	-
CM75	890	600[0.009]	360[0.021]	234[0.04]	131[0.07]	82[0.14]	67[0.19]	30[0.45]	15[0.788]	2.4[1.73]	-
CM100	1100	750[0.006]	480[0.016]	290[0.031]	150[0.063]	109[0.105]	72[0.174]	40[0.3]	20[0.526]	3.2[1.1]	-
CM125	1200	900[0.006]	570[0.014]	350[0.03]	185[0.055]	135[0.092]	89[0.151]	50[0.26]	25[0.46]	4[1.96]	-
CM150	1380	1020[0.005]	601[0.014]	416[0.028]	220[0.047]	163[0.078]	108[0.129]	60[0.22]	30[0.394]	5[0.823]	-
CM175	1490	1120[0.005]	655[0.013]	474[0.026]	255[0.039]	190[0.065]	129[0.108]	70[0.19]	35[0.329]	5.6[0.686]	-
CM200	1580	1200[0.005]	700[0.011]	525[0.022]	290[0.027]	216[0.054]	144[0.1]	80[0.153]	40[0.274]	6.4[0.67]	-
CH25	168	126[0.032]	90[0.075]	54[0.15]	24[0.32]	18[0.64]	12[1.1]	8[1.7]	6[2.6]	5[3.9]	0.3[12]
CH50	365	292[0.025]	177[0.045]	132[0.1]	69[0.25]	54[0.49]	40[0.73]	29[1.1]	12[1.6]	5[1.6]	0.45[7.8]
CH75	504	396[0.018]	282[0.033]	162[0.06]	90[0.11]	72[0.18]	51[0.27]	37[0.42]	25[0.62]	6[1.3]	0.6[5.4]

C系列 多级真空发生器

外形尺寸

(mm)

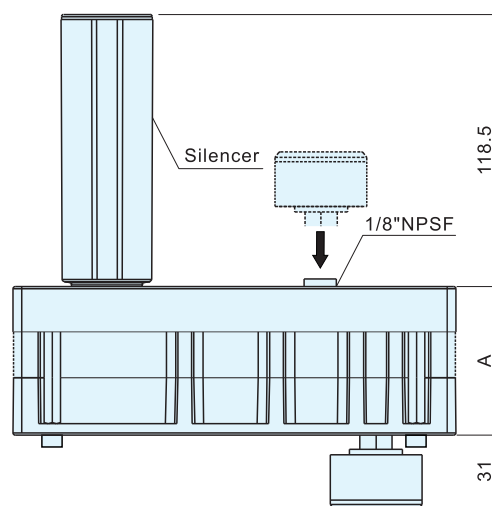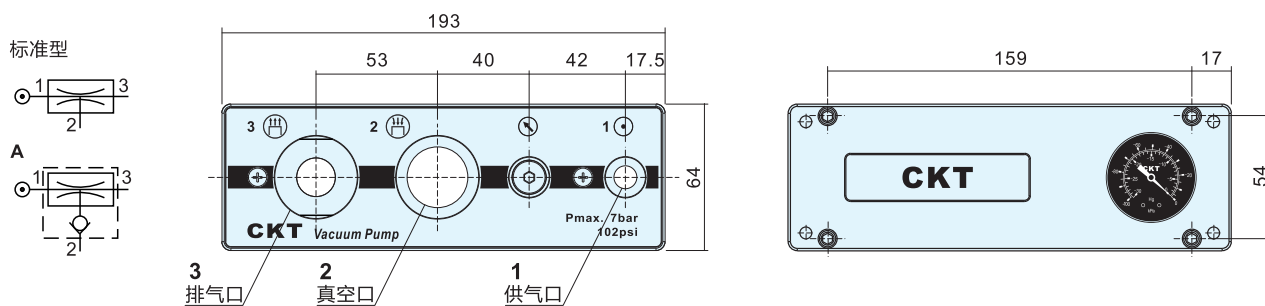

型号	A
C□25	45
C□50	
C□75	65
C□100	
C□125	85
C□150	
C□175	105
C□200	

型号	供气口	真空口	排气口
C□□-B	G1/8"	G3/4"	G3/4"
C□□-C	G1/4"	G3/4"	G3/4"
C□□-D	G1/4"	G1"	G3/4"

备件和配件



套件包括密封垫、密封阀片和密封堵头

型号	丁腈橡胶	氟橡胶	三元乙丙橡胶
CL(M,H)25	C-SN-25	C-SV-25	C-SE-25
CL(M,H)75	C-SN-75	C-SV-75	C-SE-75
CL(M)125	C-SN-125	C-SV-125	C-SE-125
CL(M)175	C-SN-175	C-SV-175	C-SE-175